

Model No. LD780V10C16
780nm 10mW 60°C Laser Diode in TO-18 Ø5.6mm Package

FEATURES

- 780nm 10mW CW AlGaAs Laser Diode
- Package: TO-18 (dia. 5.6mm)
- Dual Beam: 14um pitch (beam to beam)
- Built-in photodiode for monitoring laser diode

APPLICATIONS

- Industrial optical module
- Sensor
- Laser printer
- Digital copier

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	CONDITION	RATING	UNIT
OPTICAL OUTPUT POWER	P _O	CW	15	mW
REVERSE VOLTAGE (LD)	V _{RL}	-	2	V
REVERSE VOLTAGE (PD)	V _{RD}	-	30	V
OPERATING TEMPERATURE	T _{opr}	-	-10 to +60	°C
STORAGE TEMPERATURE	T _{stg}	-	-40 to +85	°C

ELECTRICAL AND OPTICAL CHARACTERISTICS (T_c = 25 °C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	DIFF.	UNIT	CONDITIONS
LASING WAVELENGTH	λ _p	775	788	800	1.8	nm	P _O = 10mW
THRESHOLD CURRENT	I _{th}	8	14	20	2	mA	-
OPERATING CURRENT	I _{op}	-	25	40	-	mA	P _O = 10mW
DIFFERENTIAL EFFICIENCY	η	0.55	0.75	0.95	-	mW/mA	5mW/I(15mW)-I(10mW)
OPERATING VOLTAGE	V _{op}	1.5	1.8	2.4		V	P _O = 10mW
MONITOR CURRENT	I _m	0.5	1.0	2.0	30%	mA	P _O = 10mW
PARALLEL DIVERGENCE ANGLE	Θ _{//}	7	9	12	2	deg	P _O = 10mW
PERPENDICULAR DIVERGENCE ANGLE	Θ _⊥	25	31	35	3	deg	P _O = 10mW
PARALLEL FFP DEVIATION ANGLE	Δ Θ _{//}	-2	0	+2		deg	P _O = 10mW
PERPENDICULAR FFP DEVIATION ANGLE	Δ Θ _⊥	-3	0	+3		deg	P _O = 10mW
ASTIGMATISM	A _s			10	2	um	P _O = 10mW
CENTER TO CENTER SPACING BETWEEN ADJACENT BEAMS		13.5	14	14.5		um	SEM measurement
PD DARK CURRENT	I _d	-	-	100	-	nA	-
EMISSION POINT ACCURACY	Δx Δy Δz	-60	0	+60		um	P _O = 10mW



Note: The above specifications are subject to change without notice.




LASERMATE GROUP, INC.

The Friend of Lasers

MECHANICAL OUTLINE (unit: mm)

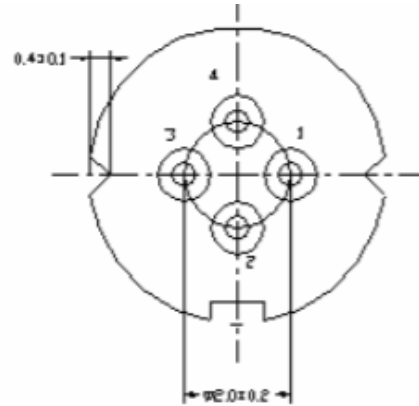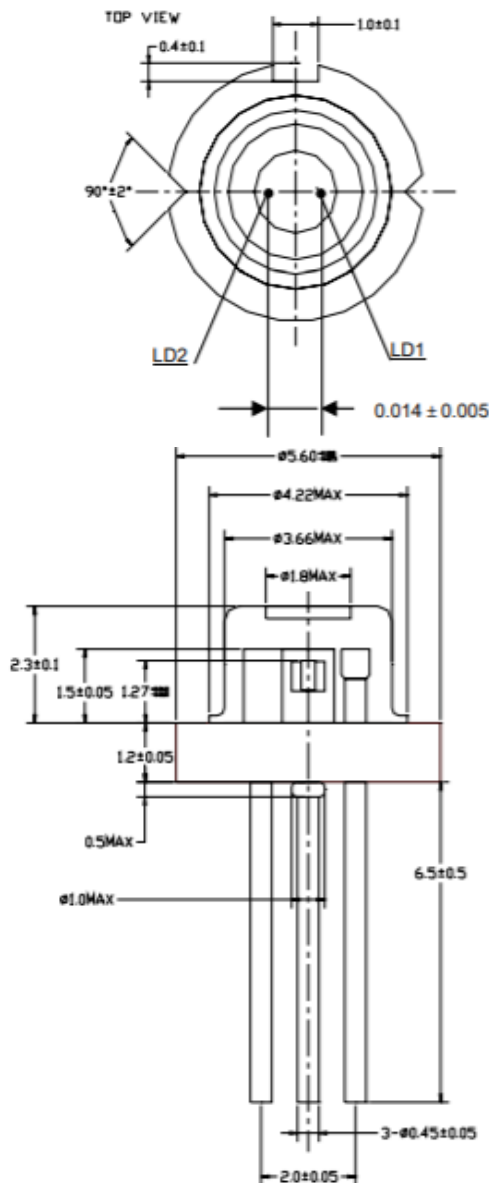

Pin Configuration

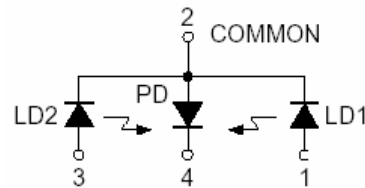

PRECAUTIONS

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

Note: The above specifications are subject to change without notice.



19608 Camino De Rosa, Walnut, CA 91789, USA | Tel: (909)718-0999 | Fax: (909)718-0998 |

E-mail: info@lasermate.com | URL: <http://www.lasermate.com>