

Model No. LD780B3L17
780nm 3mW 70°C Laser Diode in Lead Frame Package

FEATURES

- 780nm 3mW CW AlGaAs Laser Diode
- Package: Lead Frame
- Built-in photodiode for monitoring laser diode
- Attractive light source

APPLICATIONS

- Industrial optical pick up and sensor applications
- CD, CD-ROM

ABSOLUTE MAXIMUM RATINGS


PARAMETER	SYMBOL	CONDITION	RATING	UNIT
OPTICAL OUTPUT POWER	P_O	CW	4.5	mW
REVERSE VOLTAGE (LD)	V_{RL}	-	2	V
REVERSE VOLTAGE (PD)	V_{RD}	-	30	V
OPERATING TEMPERATURE	T_{opr}	-	-10 to +70	°C
STORAGE TEMPERATURE	T_{stg}	-	-40 to +85	°C

ELECTRICAL AND OPTICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$)


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
LASING WAVELENGTH	λ_p	770	785	810	nm	$P_O = 3\text{mW}$
THRESHOLD CURRENT	I_{th}	-	25	40	mA	-
OPERATING CURRENT	I_{op}	-	30	50	mA	$P_O = 3\text{mW}$
DIFFERENTIAL EFFICIENCY	η	0.3	0.5	0.7	mW/mA	$2\text{mW}/I(3\text{mW}) - I(1\text{mW})$
OPERATING VOLTAGE	V_{op}	-	1.9	2.3	V	$P_O = 3\text{mW}$
MONITOR CURRENT	I_m	0.09	0.15	0.6	mA	$P_O = 3\text{mW}$
PARALLEL DIVERGENCE ANGLE	$\Theta_{//}$	8	12	16	deg	$P_O = 3\text{mW}$
PERPENDICULAR DIVERGENCE ANGLE	$\Theta_{\perp}$	20	33	45	deg	$P_O = 3\text{mW}$
PARALLEL FFP DEVIATION ANGLE	$\Delta \Theta_{//}$	-3	0	+3	deg	$P_O = 3\text{mW}$
PERPENDICULAR FFP DEVIATION ANGLE	$\Delta \Theta_{\perp}$	-3.6	0	+3.6	deg	$P_O = 3\text{mW}$
EMISSION POINT ACCURACY	$\Delta x \Delta y$	-100	0	+100	um	$P_O = 3\text{mW}$
EMISSION POINT ACCURACY	Δz	-150	0	+150	Um	$P_O = 3\text{mW}$

Note: The above specifications are subject to change without notice.

MECHANICAL OUTLINE (unit: mm)

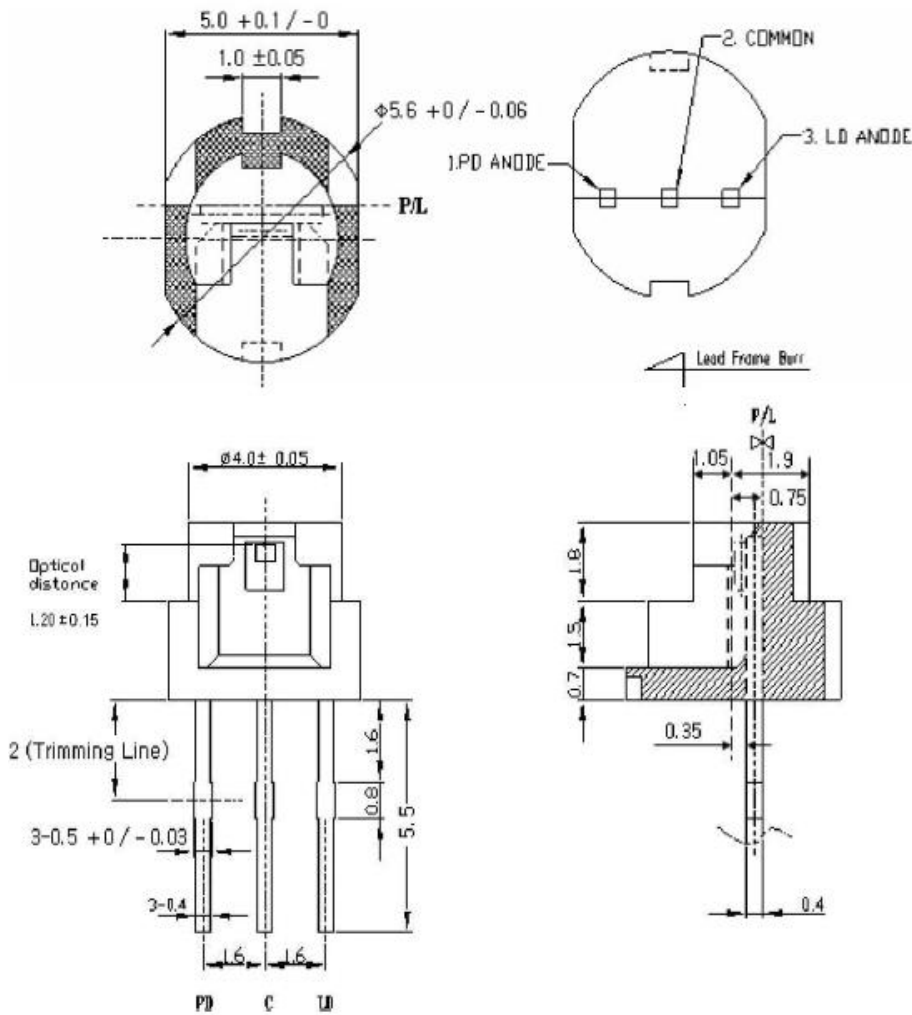

Pin Configuration

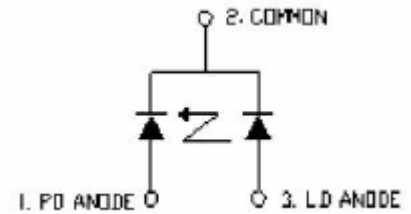

PRECAUTIONS

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

Note: The above specifications are subject to change without notice.