

Model No. LD780Z10E16
780nm 10mW 60°C Laser Diode in TO-100 Φ10.0mm Package

FEATURES

- 780nm 10mW CW AlGaAs Laser Diode
- Package: TO-100 (dia. 10.0mm)
- Number of beams: 8
- Nominal beam to beam separation: 14μm pitch (beam to beam distance)
- Built-in photodiode for monitoring laser diode

APPLICATIONS

- Laser printer
- Digital copier
- Industrial optical module

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	CONDITION	RATING	UNIT
OPTICAL OUTPUT POWER	P _O	CW	15	mW
REVERSE VOLTAGE (LD)	V _{RL}	-	2	V
REVERSE VOLTAGE (PD)	V _{RD}	-	30	V
OPERATING TEMPERATURE	T _{opr}	-	-10 to +60	°C
STORAGE TEMPERATURE	T _{stg}	-	-40 to +85	°C

ELECTRICAL AND OPTICAL CHARACTERISTICS (T_c = 25 °C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	DIFF.	UNIT	CONDITIONS
LASING WAVELENGTH	λ _p	775	785	800	2	nm	P _O = 15mW
THRESHOLD CURRENT	I _{th}	-	12	18	2	mA	
OPERATING CURRENT	I _{op}	-	33	44	3	mA	P _O = 15mW
DIFFERENTIAL EFFICIENCY	η	0.3	0.6	1.2	0.2	mW/mA	
OPERATING VOLTAGE	V _{op}	-	2	2.5		V	P _O = 15mW
MONITOR CURRENT	I _m	0.4	1.0	1.5	30%	mA	P _O = 15mW
PARALLEL DIVERGENCE ANGLE	θ _∥	7	10	12	2	deg	P _O = 15mW
PERPENDICULAR DIVERGENCE ANGLE	θ _⊥	25	30	35	4	deg	P _O = 15mW
PARALLEL FFP DEVIATION ANGLE	Δ θ _∥	-3	0	+3		deg	P _O = 15mW
PERPENDICULAR FFP DEVIATION ANGLE	Δ θ _⊥	-3	0	+3		deg	P _O = 15mW
CENTER TO CENTER SPACING BETWEEN ADJACENT BEAMS		13.7	14	14.3		μm	SEM measurement
BEAM SPACING		97.7	98	98.3		μm	LD1 to LD8

Note: The above specifications are subject to change without notice.








LASERMATE GROUP, INC.

The Friend of Lasers

MECHANICAL OUTLINE (unit: mm)

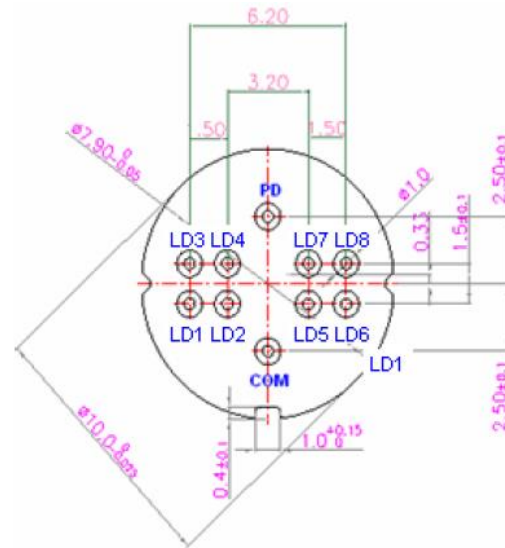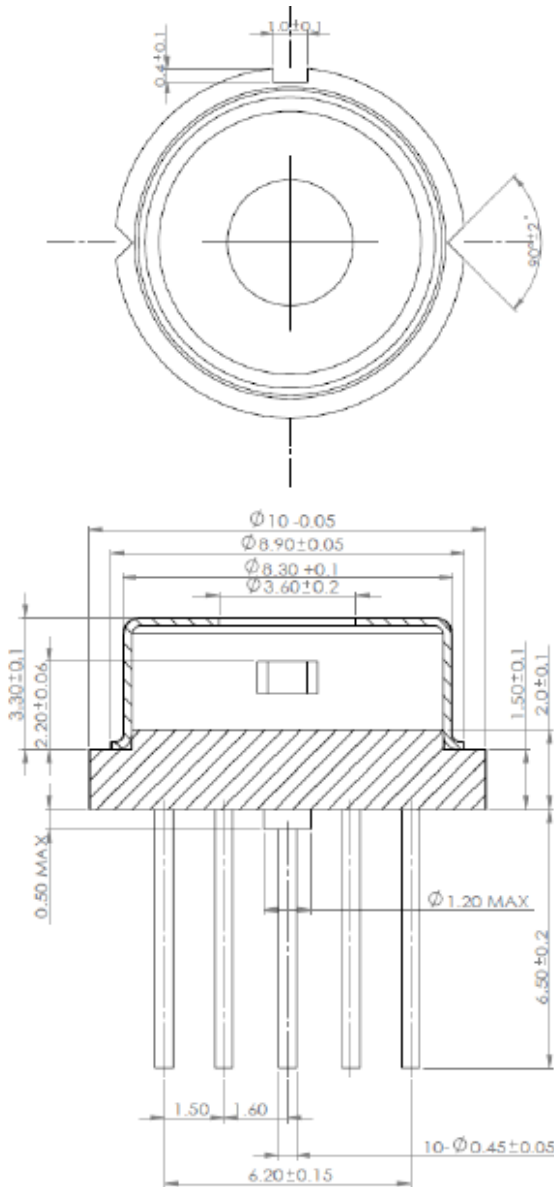

Pin Configuration

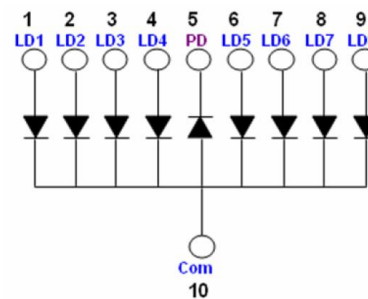

PRECAUTIONS

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

Note: The above specifications are subject to change without notice.



19608 Camino De Rosa, Walnut, CA 91789, USA | Tel: (909)718-0999 | Fax: (909)718-0998 |

E-mail: info@lasermate.com | URL: <http://www.lasermate.com>