



LASERMATE GROUP, INC.

The Friend of Lasers

Model No. LD940A300C16
940nm 300mW 60°C Laser Diode in TO-18 Ø5.6mm Package

FEATURES

- 940nm 300mW CW Infrared Laser Diode
- Package: TO-18 (dia. 5.6mm)
- Single transverse / TE mode laser

APPLICATIONS

- Industrial optical module
- Sensor

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	CONDITION	RATING	UNIT
OPTICAL OUTPUT POWER	P_O	CW	300	mW
REVERSE VOLTAGE (LD)	V_{RL}	-	2	V
REVERSE VOLTAGE (PD)	V_{RD}	-	30	V
OPERATING TEMPERATURE	T_{opr}	-	-10 to +60	°C
STORAGE TEMPERATURE	T_{stg}	-	-40 to +85	°C

ELECTRICAL AND OPTICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
LASING WAVELENGTH	λ_p	930	940	955	nm	$P_O = 300\text{mW}$
THRESHOLD CURRENT	I_{th}	-	20	40	mA	
OPERATING CURRENT	I_{op}	-	400	450	mA	$P_O = 300\text{mW}$
MONITOR CURRENT	I_m	0.1	0.5	1.5	mA	$P_O = 300\text{mW}$
DIFFERENTIAL EFFICIENCY	η	0.5	0.8	1.1	mW/mA	$P_O = 300\text{mW}$
OPERATING VOLTAGE	V_{op}	1.8	2.1	2.5	V	$P_O = 300\text{mW}$
PARALLEL DIVERGENCE ANGLE	$\Theta_{//}$	7	10	13	deg	$P_O = 300\text{mW}$ FWHM
PERPENDICULAR DIVERGENCE ANGLE	$\Theta_{\perp}$	22	28	34	deg	$P_O = 300\text{mW}$ FWHM
PARALLEL FFP DEVIATION ANGLE	$\Delta \Theta_{//}$	-3	-	+3	deg	$P_O = 300\text{mW}$
PERPENDICULAR FFP DEVIATION ANGLE	$\Delta \Theta_{\perp}$	-3	-	+3	deg	$P_O = 300\text{mW}$
EMISSION POINT ACCURACY	$\Delta x \Delta y \Delta z$	-80	0	+80	um	



Note: The above specifications are subject to change without notice.




19608 Camino De Rosa, Walnut, CA 91789, USA | Tel: (909)718-0999 | Fax: (909)718-0998 |
E-mail: info@lasermate.com | URL: <http://www.lasermate.com>



MECHANICAL OUTLINE (unit: mm)

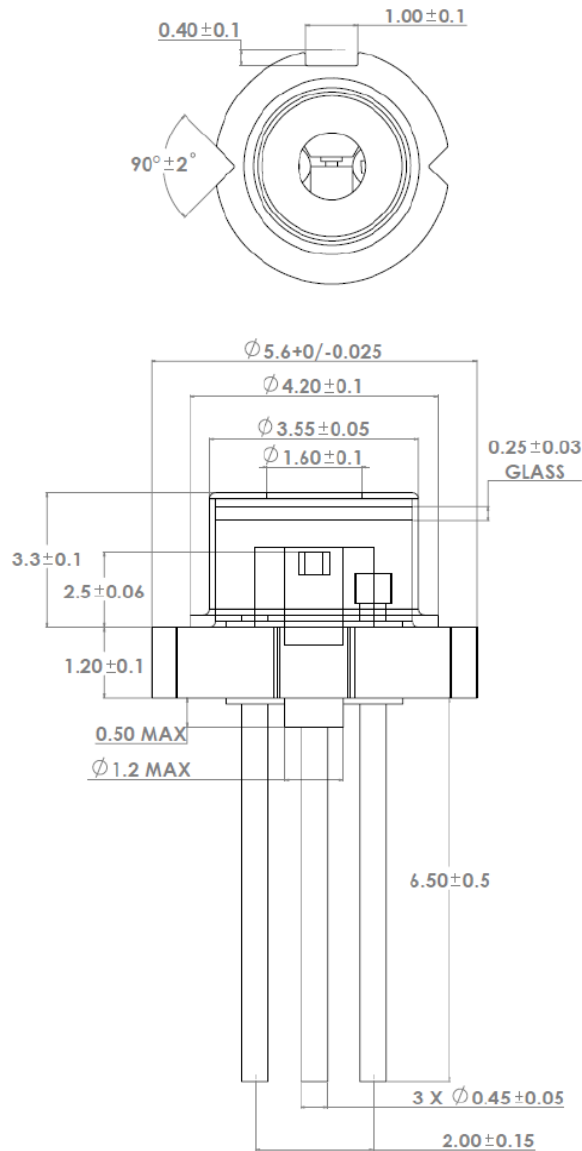

Pin Configuration



PRECAUTIONS

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

Note: The above specifications are subject to change without notice.

